



微信公众账号



FACEBOOK

安徽长庚光学科技有限公司

www.laowalens.com

服务热线: 400-066-1316

Email: sales@laowalens.com

电话Tel: (+86) 551-69107990

地址: 合肥市庐阳区天水路与太和路交口庐阳中科大校友创新园5号楼

Add: Building 5, USTC Alumni Innovation Park, Crossing of Tianshui
and Taihe Road, Luyang District, Hefei City, Anhui Province, China

FF Sword 180mm T4.6 Macro 1.5X Cine

使用手册

Instruction Manual

LAOWA 老蛙

本公司保留更改产品设计与规格的权利, 届时恕不另行通知;
本公司保留对此《使用说明》的最终解释权。
Please note we reserve the right to change our product's
design and specifications at any time without notice and
to the final interpretation of the *Instruction Manual*.



Preface

Thank you very much for purchasing FF Sword 180mm T4.6 Macro 1.5X Cine full frame macro cinema lens. This lens can shoot from infinity to 1.5X magnification. With several ED glasses, it can maximize the elimination of chromatic dispersion. Whether at macro or infinity, excellent image quality can be achieved in the focus range, providing users with stable and reliable support. It can shoot tiny objects, such as small insects, jewelry, etc.



 *For operational safety, please read the manual and precautions carefully before using this product, and keep the manual at a place that is easily accessible when needed. If you encounter a problem that cannot be solved, please ask for technical support through email.*

Features

- 1.FF Sword 180mm T4.6 Macro 1.5X Cine is different from traditional macro lens. On the basis of full frame system of high-performance imaging, this lens can achieve high resolution image quality from infinity to macro. Besides, under macro mode, it can get amazing 1.5X magnification of objects. With the help of several ED glasses, this lens has no obvious chromatic dispersion under 1.5X magnification. The higher magnification gives users more space for creation.
- 2.It adopts 13 aperture blades, therefore, the aperture is more round, which can create a nearly circular blur effect for the point light source and provide a beautiful and soft bokeh.
- 3.This lens is constructed of 12 elements in 9 groups, which can bring high resolution imaging. The all-metal structure ensures durability of the lens for long-term use.

Precautions


■ ⚠ Safety Precautions

- Do not disassemble, modify the lens by yourself. Do not touch the internal parts that become exposed as the result of external force.
- Do not leave the lens where it will be exposed to high temperatures, such as in direct sunlight and an enclosed vehicle. Excessive heat may deform the glass elements and other parts of the lens.
- Whether it is attached to the camera or not, do not leave the lens under the sun without the lens cap attached. This is to prevent the lens from concentrating the sun's rays, which could cause a fire.
- Do not place the sun in the frame center when shooting with backlight. Doing so might cause a fire or harm your eyes.

■ Maintenance Precautions

- Do not touch the surface of the lens directly. Brush off any dust with a blower. Wipe the surface with a cleaning cloth or a lens tissue.
- Try a circular motion from the center outward to remove oil, fingerprints and grime on the lens surface.
- If your lens is brought directly from a cold place to a warm place, condensation may appear on the lens. To avoid this, be sure to take some action to protect the lens.

Name of each part

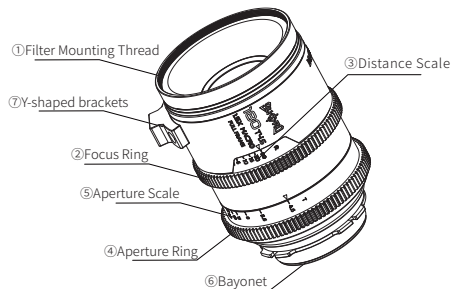

Instructions

■ To attach the Lens

Remove the rear lens cap. Align the mounting index ⑥ on the lens bayonet with the mounting index on the camera. Place the lens on the camera mount and attach the lens according to the proper installation method of the mount type. Do not use excessive force during installation to avoid damage to the bayonet.

■ To remove the lens

Turn the camera off. While pressing and holding the lens release button on the camera, rotate the lens in the reverse direction for attaching the lens until it stops, then detach the lens. After installing the lens, try rotating it to make sure it is fixed to the camera. In order to ensure more stability of the lens, install lens guide rails and Y-shaped brackets as required.

■ Focusing

This is a fully manual lens. Rotate the focus ring ② slowly to get focus. Turn the focus ring slowly and gently to prevent the focus mechanism from damage.

The distance scale ③ and depth of field scale are for instructional purposes. Actual focus and DOF may slightly differ from those scale indications.

To get precise focus, it is recommended to focus wide open when the camera position is fixed. Get focus first, then set the desired aperture by turning the aperture ring.

For the ease of focusing, turn on the focus peaking on the camera. (Note that the function depends on camera models.)

■ Macro Photography Mode

The maximum magnification is 1.5X and the minimum focusing distance is 30.6cm.

■ Setting the Aperture

Aperture is set through the aperture ring on the lens. According to the shooting situation and the desired depth of field, rotate the aperture ring ④ on the lens to the corresponding aperture.

Since the lens has no CPU data, the aperture values cannot be recorded.

■ Method of Shim Installation and Debugging

Since the bayonet flange distances of PL mount cameras produced by different manufacturers are different, our lens can compensate the difference of flange distance by adjusting the thickness of bayonet shim. Specific method: install the lens on the camera. Then, choose a shooting subject that can confirm the shooting distance (for example, 5 feet 4 inches). After focusing rightly, check the actual scale value on the focus handwheel. If the scale value is greater than 5 feet 4 inches, you should change the original shim and choose a thinner shim for debugging. Otherwise, you need to choose a thicker shim. After debugging, the scale value is accurate and debugging is completed.

■ Focusing Methods

Method 1 Focus after magnification is predetermined

①Determine magnification in advance, then turn the focus ring to the desired magnification scale.

②Check the frame by the viewfinder or [Live View] on the camera and pan the camera back and forth to roughly focus until the right focal length is determined.

③Rotate the focus ring to achieve precise focus.

Method 2

Set the frame first. Turn the focus ring while you are checking the image through the viewfinder or [Live View] on the camera. After setting the composition, perform steps ② and ③ of Method 1.

When shooting at high magnifications, the working distance of the lens is very short and it is easy to touch the shooting subject. Therefore, please be careful when shooting.

Magnification refers to the proportional relation between the size of the image recorded on the sensor or film and the actual size of the shooting subject.

Specifications

FF Sword 180mm T4.6 Macro 1.5X Cine	
Format Compatibility	FF
Focal Length	180mm
Aperture Range	T4.6-32
Angle of View	13.7°
Lens Structure	12 elements in 9 groups
Aperture Blades	13
Focus Throw	270°
Aperture Throw	61.3°
Focus Scale	Foot/Meter
Min. Focusing Distance (Object Image Distance)	30.6cm
Focus Mode	Manual (MF)
Follow Focus Pitch	0.8m
Filter Thread	φ77mm
Dimensions	Ø85.6mm*125.21mm
Weight	About 734g (without front lens cap and rear lens cap)
Mounts	PL Mount (EF/E/R/L) Bayonet Components

