



微信公众账号 FACEBOOK

安徽长庚光学科技有限公司
www.laowalens.com

服务热线:400-066-1316
Email: sales@laowalens.com
电话Tel:(+86) 551-69107990
地址:合肥市庐阳区天水路与太和路交口庐阳中科大校友创新园5号楼
Add:Building 5, USTC Alumni Innovation Park, Crossing of Tianshui
and Taihe Road, Luyang District, Hefei City, Anhui Province, China

LAOWA MFT 10mm F2.0
C&D-Dreamer

使用手册
Instruction Manual

LAOWA 老蛙

本公司保留更改产品设计与规格的权利，届时恕不另行通知；
本公司保留对此《使用说明》的最终解释权。
Please note we reserve the right to change our product's
design and specifications at any time without notice and
to the final interpretation of the *Instruction Manual*.



PREFACE

Thank you very much for purchasing LAOWA MTF 10mm F2.0 C&D-Dreamer wide-angle lens. This ultra-wide-angle lens is designed for Micro Four Thirds Cameras. This lens is compact and light in weight. The lens is equipped with a CPU chip and the aperture can be controlled via the camera body.



⚠ *Read this operation manual carefully to familiarize yourself with its contents and ensure that you can operate the product properly. Keep the Instruction Manual in a safe place where it can easily be referenced whenever required. If you are still unable to solve the problem by reading the manual, please contact our after-sales service for further technical support.*

FEATURES

- The lens is extremely compact and lightweight. It measures φ 53mm*41mm in size and weighs only around 125g. Using it with MFT cameras, the whole set is compact and easy to carry.
- The lens is equipped with a CPU chip and the aperture can be controlled via the camera body. All the lens data is directly recorded on EXIF. It is also compatible on the DJI X5 camera and the aperture value can be adjusted directly by remote control.
- The lens is constructed by 11 optical elements in 7 groups with 2 aspherical lenses and 3 ED lenses to deliver excellent sharpness. The all-metal structure ensures the lens' assembly accuracy and reliability.

PRECAUTIONS

⚠ Safety Precautions


- Do not disassemble, modify the lens by yourself. Do not touch the internal parts that become exposed as the result of external force.
- Do not leave the lens where it will be exposed to high temperatures, such as in direct sunlight and an enclosed vehicle. Excessive heat may deform the glass elements and other parts of the lens.
- Whether it is attached to the camera or not, do not leave the lens under the sun without the lens cap attached. This is to prevent the lens from concentrating the sun's rays, which could cause a fire.
- Do not place the sun in the frame center when shooting with backlight. Doing so might cause a fire or harm your eyes.
- The camera's built-in flash will cause barrel shadow if used with this lens. For best results, please only use an external flash unit.

PRECAUTIONS

Maintenance Precautions

- Do not touch the surface of the lens directly. Brush off any dust with a blower. Wipe the surface with a cleaning cloth or a lens tissue.
- Try a circular motion from the center outward to remove oil, fingerprints and grime on the lens surface.
- If your lens is brought directly from a cold place to a warm place, condensation may appear on the lens. To avoid this, be sure to take some action to protect the lens.

NOMENCLATURE

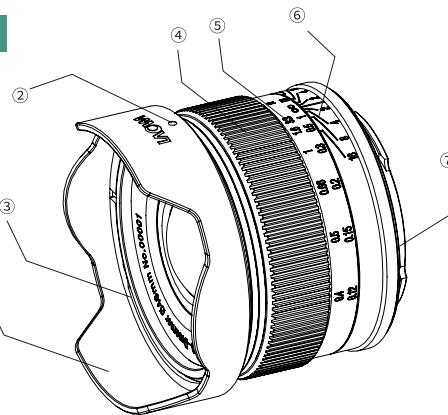

①Lens hood
②Lens hood mounting index
③Filter (lens cap) mounting thread
④Focus ring
⑤Distance (magnification) scale
⑥Depth of field scale
⑦Lens mounting index

INSTRUCTIONS

■ To attach the Lens

- Remove the rear lens cap. Align the mounting index⑦ on the lens bayonet with the mounting index on the camera, and place the lens on the camera mount, then rotate the lens according to the proper direction of the mount type until it locks. Do not use excessive force during installation to avoid damage to the bayonet.

■ To remove the lens

- Turn the camera off. While pressing and holding the lens release button on the camera, rotate the lens in the reverse direction for attaching the lens until it stops, then detach the lens.
- After attaching the lens, please try to rotate the lens to make sure it mounted onto the camera properly.

INSTRUCTIONS

■ Attaching/detaching lens hood

- Align the mounting index② on the lens hood and the lens. Turn the hood clockwise until it locks.
- For detaching lens hood, rotate it counterclockwise.
- It is recommended that you use a lens hood to reduce strong light and protect the front element.
- Lens hood may be unavailable when using certain filters.
- When storing, turn over the lens hood and place it onto the lens backward.
- When shooting with a flash, the lens hood may block light and cause vignetting. So when shooting with the camera's built-in flash or with the external flash unit that is not high enough, please remove the hood before shooting.

■ Focusing

- This is a fully manual lens. Rotate the focusing ring④ slowly to get focus.
- Turn the focus ring slowly and gently to prevent the focus mechanism from damage.
- The distance scale⑤ and depth of field scale⑥ are for instructional purposes. Actual focus and DOF may slightly differ from those scale indications.
- To get precise focus, it is recommended to focus wide open when the camera position is fixed. Get focus first, then set the desired aperture by turning the aperture ring.
Turn on the focus peaking on the camera to help focusing. (Note that the function depends on camera models.)

INSTRUCTIONS

■ Setting the Aperture

- Aperture value is controlled via the camera body. According to the shooting situation and desired depth of field, rotate the control dial on the camera body to the corresponding aperture.
- Since the lens has CPU data, the aperture value can be recorded.

INSTRUCTIONS

■ Focusing Tips

Method 1 Magnification Priority

- ① Set the magnification first, and then turn the focus ring to the desired magnification mark on the lens.
- ② Check the frame by viewfinder or [Live View] on the camera and try to get focus by moving the camera back and forth until obtaining the proper focal length.
- ③ Rotate the focus ring to achieve precise focus.

Method 2 Framing Priority


Set the frame first. Turn the focus ring while you are checking the image through viewfinder or [Live View] on the camera, and then follow steps 2, 3 as the method 1 above.

- *For high magnification close-ups, because of the extremely short working distance, please be careful not to touch the subject.*
- *Magnification refers to the proportional relationship between the size of an image recorded on a sensor or film and the actual size of the subject.*

SPECIFICATIONS


MFT 10mm F2.0 C&D-Dreamer	
Lens No.	MFT 10mm F2.0 C&D-Dreamer
Format	M43
Focal Distance	10mm
Max. Aperture	F2.0
Angle of View	96°
Lens Construction	11 elements/ 7 groups (ED glass x3, aspherical glass x2)
Aperture Blades	5 (auto aperture)
Min. Aperture	F22
Min. Shooting Distance	12cm
Max. Magnification	0.15x
Focusing	MF
Filter Thread	Φ46mm
Dimensions	Φ53mm*41mm
Weight	125g
Mounts	M43

LENS CONSTRUCTION

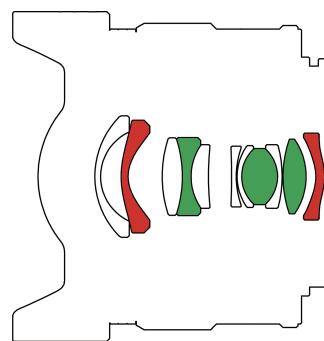

● Extra-low Dispersion Glass
● Aspherical Glass

MTF

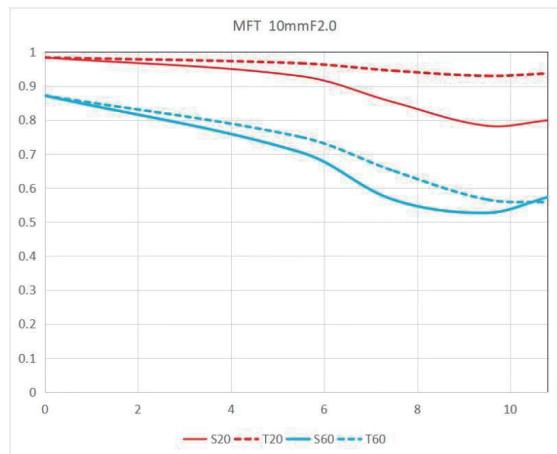

LAOWA



15



16